

PAASCHE

AIRBRUSH COMPANY



CATALOG

WWW.PAASCHEAIRBRUSH.COM
E-Mail:info@paascheairbrush.com

Phone:(800)621-1907

9511 58th Place, Kenosha, WI 53144



Paasche® provides the largest selection of airbrush models, industrial sprayers and support equipment worldwide. Using only the highest quality materials in combination with the tightest quality control, Paasche products are unequalled by any other airbrush manufacturer in the world. Each unit is carefully assembled, individually inspected and finally tested in actual use by highly skilled craftsmen, in the USA, to meet Paasche's high standard of excellent performance.

ABOUT AIRBRUSHES

DOUBLE ACTION AIRBRUSH

Refers to the method action required to control spray pattern. Pressing down on the button activates the amount of air flow and pulling back determines the amount of fluid released. This allows the user to change the width of line, color, and the opaqueness of color with one hand. Double Action models take more practice to use but are better for free hand detail work. All PTFE packings.

SINGLE ACTION AIRBRUSH

Unlike the double action where air and fluid controls are combined, these same controls are independent of each other with the single action airbrush. While one hand is releasing a pre-set amount of air by pressing down on the button, the other hand adjusts a separate control for color feed. Single action models are quick to learn and easy to use. They tend to be best for spraying solid coats, uniform lines or dots and stencil work. They clog less easily than the double action internal mix models and can spray slightly heavier paints.

INTERNAL MIX

Method in which air and paint are mixed inside the airbrush producing a fine spray.

EXTERNAL MIX

Method in which air and paint are mixed outside the airbrush producing a larger spray.

GRAVITY FEED

Gravity Feed models include all airbrushes that have material containers on top of the airbrush body.

SIPHON BOTTOM FEED

Siphon Feed models have material containers with connections at the bottom of the airbrush body.

SIPHON SIDE FEED

Siphon Side Feed models have material containers with connections at the left or right side of the airbrush body.

AIRBRUSH SELECTION GUIDE: BACK COVER

TABLE OF CONTENTS

<u>ITEM:</u>	<u>PAGE</u>	<u>ITEM:</u>	<u>PAGE</u>
<u>DOUBLE ACTION - INTERNAL MIX</u>		L SPRAYER	9
VL SIPHON FEED	3	LXG and LXS HVLP SERIES	20
VLS SIPHON FEED		LMG & HG HVLP TOUCHUP SERIES	21
MIL SIPHON FEED	4		
TS SIPHON FEED	4	<u>OTHER IMPORTANT ITEMS</u>	
TG GRAVITY FEED	5	ABRASIVE COMPOUND	10
TGX GRAVITY FEED	5	ACCESSORIES and HARDWARE	14-15
RG GRAVITY FEED	6	AIR COMPRESSORS-PRESSURE CAN-REGULATOR	12-13
JM GRAVITY FEED	6	AIR HOSE and AIR HOSE TO AIRBRUSH ADAPTERS	14
54-3 GRAVITY FEED - Production Setup	9	BOOKS and DVD'S	17
<u>SINGLE ACTION - EXTERNAL MIX</u>		BOTTLE and COVER ASSEMBLIES	16
H SIPHON FEED	7	BOTTLES, COVERS, GASKETS	16
HS SIPHON FEED	7	CASES	17
EZ SIPHON FEED	8	TANNING SOLUTION & SPRAY SYSTEMS	18-19
<u>SINGLE ACTION - INTERNAL MIX</u>		RESPIRATORS	17
SI SIPHON FEED	8	SPRAY BOOTHS	22-23
62 SIPHON FEED	9	STENCILS: TATTOOS, NAILS & DESIGNS	15
<u>AIRBRUSH PACKAGES and SPECIALTY ITEMS</u>		TATTOO PAINTS	25
AIRBRUSH PACKAGES WITH COMPRESSOR	11	TURNTABLES	22
AEC ETCHING TOOL	10		
AECR ETCHING TOOL	10		
LAC ABRASIVE GUN	10		
HAPK H, 62 & FP PACKAGE	7		
FP FLOW PENCIL - EXTRUDING AIRBRUSH	9		

AIRBRUSH – DOUBLE ACTION – SIPHON FEED – INTERNAL MIX

The **VL** series is our most popular Airbrush due to its durability and ability to spray most material whether thick or thin. The **VL** airbrush offers versatility with three interchangeable head sizes. This model can achieve spray patterns from fine detail to broader coverage handling light, medium and heavy fluids. The rounded head allows for easy removal of any dried paint with just a pinch of your fingers.

The **VLS** is a significant upgrade to the classic **VL** with features that airbrushers of all levels will appreciate, such as the Anodized Aluminum Cut-Away Handle which allows quick pullback to blow out clogs. A Threaded Bottle Connector fitting locks onto the bottle stem for worry-free one-handed painting. The bottle will not fall off once fastened properly. Also the upgraded trigger for greater comfort.

Features:

- Three head sizes for any application
- Highly polished & hardened stainless steel needles for long life and reduced clogging
- Line adjustment screw that can be used to pre-adjust paint flow
- Solvent proof PTFE needle packing allows spraying of water & solvent based paints
- 1/4oz to 8oz bottle options
- Removable needle protector for fine detail spraying
- Chrome plated body

VL



VLS



VL & VLS Packaging Options:



VL-3AS & VLS-3AS:

Kits come with the VL or VLS airbrush with size 3 head, size 1 & 5 heads, 1oz bottle assembly, 1/4oz metal cup, 1oz storage bottle, 6' braided hose, hanger, wrench and lessons book.

VL-SET with metal handle order [VL-202S](#)
VLS comes standard with metal handle



VL-3WC & VLST-3WC:

Both kits come with the VL or VLS airbrush with size 3 head packed in the P-178 wood case, size 1 & 5 heads, 1oz bottle assembly, 1/4oz metal cup, 1oz storage bottle, 6' braided air hose, hanger, wrench and lessons book.



VL-1AS:

The kits come with the VL airbrush with size 3 head, 1oz bottle assembly, 1oz storage bottle, 6' braided air hose, hanger, wrench and lessons book.



VL-CARD:

The kits come with the VL airbrush with size 3 head, 1oz bottle assembly, 6' braided air hose & wrench.

- Size #1** Light Fluids-Spray Pattern 1/32"- 1" (.55mm Tip)
- Size #3** Medium Fluids-Spray Pattern 3/64"- 1-1/4" (.75mm Tip)
- Size #5** Heavy Fluids-Spray Pattern 1/16"- 1-1/2" (1.05mm Tip)

Recommended air pressure .5 CFM or more @ 20 to 50 PSI. Clean, dry air is essential for the best results.

Airbrush only (Less Accessories)

- **VL#1L, VL#3L or VL#5L**
- VL-6P (Pack of six VL#3L)**
- VLS#3L**

To convert to #1 or #5 buy matched -tip, needle & head

AIRBRUSH – DOUBLE ACTION – SIPHON FEED – INTERNAL MIX



Features:

- Three head sizes for any application
- Highly polished & hardened stainless steel needles for long life and reduced clogging
- Anodized aluminum handle with cut-out allowing for quick pullback to clear clogs
- Solvent proof PTFE needle packing allows
- 1/4oz to 8oz bottle options
- Removable needle protector for fine detail spraying
- Chrome plated body

MIL Packaging Options:



MIL-1AS & MIL-3AS:

Includes the MIL airbrush with size 3 head, 1oz bottle assembly, 1oz storage bottle, 6' braided air hose, hanger, wrench and lessons book.



MIL-3WC:

Airbrush with size 3 head packed in wood case, size 1 & 5 heads, 1oz bottle assembly, 1/4oz metal cup, 1oz storage bottle, 6' braided air hose, hanger, wrench and lessons book.



FEATURES:

- .66mm spray head
- Optional .38mm head and fan aircap
- Highly polished & hardened stainless steel needles for long life and reduced clogging
- Anodized aluminum handle
- PTFE needle packing allows spraying of solvent & water based paints
- 1/4oz to 8oz bottle options
- Chrome plated body

TS Packaging Options:



TS-1AS & TS-3AS:

Includes the TS#3 airbrush with size 3 head, Size 2 head, 1oz bottle assembly, 1oz storage bottle, 6' braided air hose, hanger, wrenches and lessons book.

MIL Double Action - Internal Mix - Siphon Feed

The MIL can be used for most any application with its fine, medium and large heads. Used for Hobbies and Crafts, Automotive, Body Painting, Taxidermy and most other applications the MIL is one of our most versatile airbrushes. Any properly thinned paint can be sprayed.

- Size #1** Light Fluids-Spray Pattern 1/32"- 1" (.55mm)
- Size #3** Medium Fluids-Spray Pattern 3/64"- 1-1/4" (.75mm)
- Size #5** Heavy Fluids-Spray Pattern 1/16"- 1-1/2" (1.05mm)

Recommended air pressure .5 CFM or more @ 20 to 50 PSI. Clean, dry air is essential for the best results.

Airbrush only (Less Accessories)

MIL#3L

MIL-6P (Pack of six MIL#3L)

For size #1 or #5 buy matched -tip, needle and aircap

TS Double Action - Internal Mix - Siphon Feed

The TALON was designed to deliver finer detail than our other siphon models and can also use our TAF-3 Fan Aircap for broad coverage. No other airbrush give this range of spray patterns The TALON siphon model.



Options for Talon:

- TAF-3 FAN AIRCAP for .66mm head. Gives a 2-1/2 to 3 inch fan pattern
- .66mm Head Installed
- Optional .38mm Head - for finer detail down to a hair line
- TAL-34 Cut-away handle with stop

Recommended air pressure .5 to 1 CFM @ 20 to 50 PSI. Clean, dry air is essential for best results.

Airbrush only (Less Accessories)

TS#3L

TS-6P (Pack of six TS#3L)

To convert to size #2 buy matched -tip, needle and aircap

AIRBRUSH – DOUBLE ACTION – GRAVITY FEED – INTERNAL MIX



Features:

- Three interchangeable head sizes
- .4 ounce gravity cup with cover
- Highly polished & hardened stainless steel needles for long life and reduced clogging
- Anodized aluminum handle with cut-out allowing for quick pullback to clear clogs
- Pre-set needle stop for added paint control
- Solvent proof PTFE needle packing allows
- Removable crown cap for detail spraying
- Chrome plated body

TG Packaging Options:

TG-1AS SET:

TG-1AS airbrush with size 2 head, cup cover, size 1 & 3 heads, fan aircap, 6' braided air hose, hanger, wrenches and lessons book.



TG-3AS:

TG-3AS airbrush with size 2 head, cup cover, size 1 & 3 heads, fan aircap, 6' braided air hose, hanger, wrenches and lessons book.



TG-3WC:

TG-3AS airbrush with size 2 head packed in wood case. Includes cup cover, size 1 & 3 heads, fan aircap, 6' braided air hose, hanger, wrenches and lessons book.

TG Gravity Feed - Double Action TALON Airbrush

The **Talon** was designed to meet the highest standards and delivers an unmatched level of detail and control. The trigger and air valve have been redesigned to allow for a smoother stroke as well as ease of assembly and durability. The **TALON** is suitable for any application requiring fine detail up to 3" pattern. Applications include: graphic arts, automotive graphics, illustration, finger nail art, taxidermy, Etc.

Size #1 Light Fluids- Spray Pattern Hairline - 1" (.25mm Tip)
Size #2 Light - Med Fluids-Spray Pattern 1/64"- 1-1/4" (.38mm Tip)
Size #3 Medium Fluids- Spray Pattern 1/32"- 1-1/2" (.66mm Tip)
 Fan Aircap Size #3 - 2-1/2"-3" Fan Pattern

Airbrush only (Less Accessories)

TG#2L

TG-6P (Pack of six TG#2L)

For size #1 or #3 buy matched -tip, needle and aircap



Features:

- Head size .2mm (.25, .38 & .66 also avail.)
- Hand polished stainless steel needle for long life and reduced paint dry
- Atomizing air control screw
- Sloped trigger for greater comfort & grip
- Solvent proof PTFE needle packing allows spraying of water & solvent based paints
- Removable needle protector for fine detail spraying
- Black chrome plated body

TGX - Vision Gravity Feed - Double Action - Internal Mix

The Paasche Vision has several upgrades compared to the standard TG model. We have designed a .2mm head which is our finest for unmatched airbrushing detail. The atomizing air valve control gives finger tip control to adjust the level of paint atomization. The trigger has been redesigned and machined with a sloped button for better comfort and grip. Lastly we have upgraded the TGX to a black chrome finish. These new features combine to make the TGX the best airbrush we have ever produced.

Size#0 Light Fluids- Spray Pattern < Hairline - 1" (.20mm Tip)
Size #1 Light Fluids- Spray Pattern Hairline - 1" (.25mm Tip)
Size #2 Light - Med Fluids-Spray Pattern 1/64"- 1-1/4" (.38mm Tip)
Size #3 Medium Fluids- Spray Pattern 1/32"- 1-1/2" (.66mm Tip)
 Fan Aircap Size #3 - 2"-3" Fan Pattern

Airbrush only (Less Accessories)

TGX#0L

TGX-6P (Pack of six TGX#0L)

To convert to size 1, 2 or 3 buy matched -tip, needle and aircap



TGX-2F:

Includes the TGX#0 airbrush with size .2mm head, .66mm head w/ fan aircap, wrenches and deluxe metal case. (Air hose not included)

AIRBRUSH – DOUBLE ACTION – GRAVITY & SIDE FEED – INTERNAL MIX



“Juvel” Gravity Feed - Double Action - Internal Mix

For the professional who needs a wider range of patterns than offered by the AB. Perfect for the project that requires detailing, tinting and shading. The “**JUVEL**” with its color cup built into the top of the body, promotes quick and easy color changes and is suited for both left and right-handed users. Great for nails!

Size #1 Light Fluids -Spray Pattern-Hairline - 1” (.25mm)

Recommended air pressure .5CFM or more @ 10 to 50 PSI. Clean, dry air is essential for the best results.

Airbrush only (Less Accessories)

JM#2L

To convert to size #1 or #2 buy matched -tip, needle and aircap

Features:

- Two interchangeable head sizes
- 1/16 ounce gravity cup
- Highly polished & hardened stainless steel needles for long life and reduced clogging
- Solvent proof PTFE needle packing allows spraying of solvent based paints
- Chrome plated body

JUVEL Packaging Options:



JM-1S:

Includes the Juvel airbrush with size 1 head, 6’ braided air hose, hanger, wrenches.



Raptor Gravity Feed - Double Action - Internal Mix

The “Raptor” offers the ultimate in versatility and control for detail, tinting and shading. The 1/4 oz sized fixed cup is great for small volumes of paint.

Size #1 Spray Pattern-Hairline -1”, Light Fluid (.25mm)

Size #2 Spray Pattern 1/32” -1”, Medium Fluid (.38mm)

Size #3 Spray

Recommended air pressure .5 CFM or more @ 15 to 50 PSI. Clean, dry air is essential for the best results.

Airbrush only (Less Accessories)

RG#1L

To convert to size #2 buy matched -tip, needle and aircap

Features:

- Two interchangeable head sizes
- 1/4 ounce cup
- Highly polished & hardened stainless steel needles for long life and reduced clogging
- Solvent proof PTFE needle packing allows spraying of solvent based paints
- Chrome plated body, Pewter colored handle and cup lid.

RAPTOR Packaging Options:



RG-1AS & RG-3AS:

Kit comes with the Raptor airbrush with size 2 head installed, size 2 head, size 3 head w/fan aircap, 6’ braided hose, hanger, wrench and lessons book.

AIRBRUSH – SINGLE ACTION – SIPHON FEED – EXTERNAL MIX



The world's most popular airbrush - recommended for all skill levels. Sturdy and flexible, the **H & HS** airbrushes are dependable and adaptable for practically any hobby or artistic use. The model **HS** has a threaded swivel nut for extra secure attachment to bottle assemblies. These airbrushes have three head sizes 1, 3 and 5 which are interchangeable on the airbrush.

Size #1 Light Fluid-Spray Pattern 1/32"- 1" (.45mm)
Size #3 Medium Fluid-Spray Pattern 3/64"- 1 1/4" (.63mm)
Size #5 Heavy Fluid-Spray Pattern 1/16"- 1 1/2" (1.07mm)

Features:

- Three head sizes for any application
- Highly polished & hardened stainless steel needles for long life and reduced clogging
- Spray water or solvent based materials
- 1/4oz to 8oz bottle options
- Chrome plated body
- Simple operation & easy to learn

Airbrush only (Less Accessories)

H#1L, 3L or 5L

H-6P (pack of six H#3L airbrushes)

HS#1L, 3L or 5L

Recommended air pressure .5 CFM or more @ 20 to 50 PSI.
Clean, dry air is essential for the best results.

H & HS Packaging Options:



H-3AS SET & HS-3AS

SET:

Kits come with the H or HS airbrush with size 3 head, size 1 & 5 heads, 1oz bottle assembly, 1/4oz metal cup, 1oz storage bottle, 6' braided hose,

H-SET with metal handle order [H-3MH](#)
HS-SET w/ metal handle order [HS-3MH](#)



H-1AS:

The kits come with the H airbrush with size 3 head, 1oz bottle assembly, 1oz storage bottle, 6' braided air hose, hanger, wrench and lessons book.



H-APK:

The kits come with the H#3 airbrush, FP-1/32 flow pencil, 62-1-3 sprayer, 3oz bottle assembly, 6' braided air hose, hose adapter for sprayer, hanger, wrench and lessons book.



H-CARD:

The kits come with the H airbrush with size 3 head, 1oz bottle assembly, 6' braided air hose & wrench.

AIRBRUSH – SINGLE ACTION – SIPHON FEED – INTERNAL MIX



Features:

- Three head sizes for any application
- Highly polished & hardened stainless steel needles for long life and reduced clogging
- Anodized aluminum handle
- Solvent proof PTFE needle packing allows spraying of water & solvent based paints
- 1/4oz to 8oz bottle options
- Removable needle protector for fine detail spraying
- Chrome plated body
- Simple single action operation

SI Siphon Feed - Single Action - Internal Mix

Simple in design and operation, this airbrush is ideal for the Hobbyists and Crafters that are just learning to use an airbrush. The **SI** comes in 3 sizes - #1, #3 and #5 with the purchase of different size needles, tips and aircaps.

Size #1	Light Fluids	Spray Pattern 1/32"- 1"	(.55mm Tip)
Size #3	Medium Fluids	Spray Pattern 3/64"- 1-1/4"	(.75mm Tip)
Size #5	Heavy Fluids	Spray Pattern 1/16"- 1-1/2"	(1.05mm Tip)

Recommended air pressure .5 CFM or more @ 20 to 50 PSI. Clean, dry air is essential for the best results.

Airbrush only (Less Accessories)

SI#3L

For size #1 or #5 buy matched -tip, needle and aircap

SI Packaging Options:



SI-SET:

Kit comes with the SI airbrush with size 3 head, size 1 & 5 heads, 1oz bottle assembly, 1/4oz metal cup, 1oz storage bottle, 6' braided hose, hanger, wrench and lessons book.



2000SI:

The kits come with the SI airbrush with size 3 head, 1oz bottle assembly, 1oz storage bottle, 6' braided air hose, hanger, wrench and lessons book.



EZ-STARTER Airbrush Kit

Paasche® beginners kit for the first time user of an airbrush. Sprays solvent or water based paints that are properly thinned. This is the perfect kit for novices just getting started that are unsure about airbrushing. Each set comes complete with the following items:

EZ airbrush, **1oz** color bottle assembly, 1oz storage bottle, 4' air hose, 1/4" pipe adapter for attaching to air compressor, wrench for color part and valve for propellant cans.



62 SPRAYER

Operating on relatively low pressure, the 62 Sprayer efficiently sprays glazes, fixatives, medium consistency lacquers, varnishes and enamels. It handles the application needs which fall between an airbrush and a spray gun. Used by ceramists, furniture refinishers, vehicle decorators and other hobbyists.

Recommended air pressure 1 CFM or more @ 20 to 50 PSI depending on tip size and fluid being sprayed. Clean, dry air is essential for the best results.

ORDER BY CATALOG NUMBER:

- 62-1-3** For medium consistency fluids with 3oz plastic bottle (1mm)
- 62-2-3** For heavy consistency fluids with 3oz plastic bottle (1.6mm)

The 62-1-3 can also be found in the **HAPK Hobby Auto Paint Kit**



L SPRAYER HANDPIECE WITH QUART CUP ASSEMBLY

This unit is ideal for taxidermists, ceramists and hobbyists who wish to apply lacquers, varnishes, heavy glazes and paints. Available in three tip sizes for light to heavier fluids. Air capacity of tips range from 1/2 to 6 CFM @ 30 PSI. Stipple and granulated effects require 15 to 25 lbs. air pressure depending on the material being used. Use HL-3/16 air hose.

Hand Piece and Bottle Assembly together:

- L#1C 1mm tips installed
- L#2C 1.3mm tips installed
- L#4C 2.05mm tips installed

L#1, L#2 or L#4 Sprayer Handpiece only

LSC#1, LSC#2 or LSC#4 Quart cup assembly only



FP-1/32 FLOW PENCIL - STRIPING APPLICATOR - GRAVITY FEED

The FP-1/32 Flow Pencil is an ideal instrument to flow lines onto a horizontal surface. Without masking or overspray, the operator can stripe models, wood products, metal products, metal parts and other surfaces needing decorative trim. Nib size determines width of stripe.

FP-1/32 COMPONENTS: Flow Pencil, 1/16, 3/64, 1/32 & 1/64 Nibs, Cover, Cup.



54-3 AIRPAINTING UNIT

This is the only practical production airbrush model available. The VLS airbrush, fed by a quart container, is perfect for the hobbyist and manufacturer coating or touching up a wide variety of products that require spraying large volumes of paint. The gravity feed setup also assist in spraying thicker materials.

System includes: Quart gravity bottle with table mount., fluid hose, braided air hose and VLS#3 double action airbrush.

Optional: R-75 Regulator & Moisture Trap

AIRBRUSH – SPECIALTY – ITEMS

The AEC & AECR Air Eraser Designs and Packaging are Trademarks (TM) of Paasche Airbrush Company.



AEC AIR ERASER WITH CARBIDE INSERT TIP

The Air Eraser is a versatile instrument that can erase color errors and act as an etching tool. Easy to handle, the air eraser operates like a small sand blaster with very little difficulty and a great deal of accuracy. Used by hobbyists and manufacturers to clean jewelry and fine parts, remove discoloration, rust and corrosion, etch glass or cut monograms. It can also be used in dental laboratories.

Recommended Air Pressure: .75 CFM @ 20-65 lbs. Clean, dry air is essential for best results.



AEC-K AIR ERASER KIT

COMPONENTS: AEC Air Eraser with Carbide Insert, 6oz. jar of aluminum oxide, A-1/8-6MT air hose with moisture trap, V-62 wrench A-34 hanger & 2DS (One) disposable respirator.



ER SERIES SIPHON AIR ERASER WITH CARBIDE INSERT TIP

The ER Eraser is a versatile instrument that can erase color errors and act as an etching tool. Easy to handle, the air eraser Adjusts for precise coverage or large coverage .Operates like a small sand blaster with very little difficulty and a great deal of accuracy. Used by hobbyists and manufacturers to clean jewelry and fine parts, remove discoloration, rust and corrosion, etch glass or cut monograms. It can also be used in dental laboratories.

Recommended Air Pressure: .75 CFM @ 20-65 lbs. Clean, dry air is essential for best results.



AECR REMOTE FEED AIR ERASER (Maximum Cup Pressure 50 P.S.I.)

The **AECR** reproduces all the fine accomplishments of the AEC Air Eraser and with its quart cup offers greater flexibility through use of a quart container. This in turn, offers greater freedom of movement for the operator. The Optional R-75 regulator with gauge and moisture drain gives user closer control of operating pressures as well as assisting in furnishing clean dry regulated air. Always wear protective equipment, glasses and respirator, when using Remote Feed Air Eraser. **USES ONLY AEX POWDER**

AECR COMPONENTS: AECR Remote Feed Air Eraser, quart cup, cover assembly, hose assembly, 6' air hose with moisture trap, Parts List.

OPTIONAL ACCESSORIES: R-75 regulator & water filter



LAC#3 ABRASIVE GUN

The **LAC#3** is used the same as the AEC Air Eraser but for larger jobs requiring fast cutting speed. Both have an adjustable feature which enables the user to control the amount of abrasive used. A 1/4" air connector is required. The LAC#3 has a carbide tip for longer life.

Recommended air pressure: Cutting pressures range from 20-80 lbs. depending on abrasive or cutting speed desired.

LAC#3 COMPONENTS: Quart container 32 oz. (0.946 l.), **Parts List**

OPTIONAL ACCESSORIES: HL-3/16 air hose (specify length), 80 filter respirator, 99 paint and vapor respirator, 2DS softseal respirator.

ABRASIVE / CUTTING COMPOUNDS:

Aluminum Oxide (Fast Cutting)

AEX-6 6 Ounce 240 grit
 AEX-5-240 5 lb 240 grit
 AEX-5-400 5 lb 400 grit
 AEX-25 25 lb 240 Grit

Pumice (slow to medium cutting)

AE-6OZ 6 Ounce
 AE-2 2 lb

The 240 will give you a faster cut then the 400 grit but it will be a little rougher compared to the 400 grit. The 400 grit also clogs less easily. Pumice is only for light/slow work.

AIRBRUSH PACKAGES



H-100D BEGINNERS PACKAGE: Perfect for the beginner. The 'H' airbrush is easy to use and clean. It can be used with any thinned paint. The D500SR delivers clean dry air at 0-35 P.S.I.

- D500SR** 1/5 HP air compressor & R-75 regulator
- AC-7** 7 Piece Airbrush Cleaning Kit
- H-3AS** Single action airbrush set (see pg.7)
- Shipping Weight: 10 lbs. 13 oz. (4.91kg)



VL-100D INTERMEDIATE PACKAGE: The 'VL' is our most versatile double action airbrush. It is perfect for T-shirts, taxidermy and most other applications. The D500SR delivers clean dry air at 0-35 P.S.I.

- D500SR** 1/5 HP air compressor & R-75 regulator
- AC-7** 7 piece airbrush cleaning kit
- VL-3AS** double action airbrush set (see pg. 3)
- Shipping Weight: 10 lbs. 13 oz. (4.91kg)



TG-100D PROFESSIONAL PACKAGE: The **TALON** is for the artist that requires the finest detail and control. Patterns from a hair line, using the fine aircap, needle and tip, up to 3 inches with the new TAF-3 fan aircap can be achieved. The D500SR will deliver clean dry air at 0-35 P.S.I.

- D500SR** 1/5 HP air compressor & R-75 regulator
- AC-7** Airbrush cleaning kit with 7 cleaning brushes
- TG-3AS** Gravity feed double action airbrush set (See pg. 5)
- Shipping Weight: 10 lbs. 11 oz. (4.85kg)

BEAUTY COMPRESSOR



DC150

This compact compressor works great for beauty makeup, special effects makeup, 2-15 PSI (Gravity Airbrush .38mm or smaller Voltage: 110-120 volts / 50/60HZ 1.6 Amps UL, CE, GS & ROHS
SHIPPING WEIGHT: 1.70 LBS (.77 KGS)

AIR COMPRESSORS



D500

The D500 is powerful, compact, quiet and economical. Delivers a steady pressure to any hobby / artist airbrush.

1/5 HP
Voltage: 110V / 60hz
Operating pressure 0-35 PSI

(D500-50 for European voltage 220V / 50hz)
Shipping Weight: 8 lb 3oz (3.7kg)

Features:

- Oil-less single piston compressor
- On / off switch
- Auto start and stop feature
- Light weight and portable
- ETL & CE listed
- One year warranty



D500SR

The D500SR is powerful, compact, quiet and economical. Delivers a steady pressure to any hobby / artist airbrush.

1/5 HP
Voltage: 110V / 60hz
Operating pressure 0-35 PSI

Shipping Weight: 8 lb 12oz (4kg)

Features:

- Oil-less single piston compressor
- Regulator & moisture trap
- On / off switch
- Auto start and stop feature
- Light weight and portable
- ETL & CE listed
- One year warranty



DA300R

The DA300R is powerful, compact, quiet and economical. Delivers a steady pressure to any hobby / artist airbrush.

1/5 HP
Voltage: 110V / 60hz
Operating pressure 0-35 PSI

Shipping Weight: 8 lb 10oz. (3.9kg)

Features:

- Oil-less single piston compressor
- Regulator & moisture trap
- On / off switch
- Auto start and stop feature
- Light weight and portable
- ETL & CE listed
- One year warranty



D3000R

This piston compressor is a tank mounted unit, designed for compactness and portability. The sturdy air tank stores reserve air volume. Air pressure in the tank is regulated with an automatic on/off limit switch to a maximum of 40 P.S.I.

1/5 HP
Voltage: 110V / 60hz
Operating pressure 0-35 PSI

Shipping Weight: 13 lbs (5.9kg)

Features:

- Oil-less single piston compressor
- 3/4 gallon tank
- Regulator & moisture trap
- On / off switch
- Auto start and stop feature
- ETL & CE listed
- One year warranty



D220R

The D220R is a diaphragm compressor and more powerful than the smaller 1/5 HP models. Great for airbrushers requiring higher air pressures.

1/4HP
Voltage: 110V / 60hz
Operating pressure 0-50 PSI

Shipping Weight: 11 lbs (5kg)

Features:

- Oil-less diaphragm compressor
- Regulator & moisture trap
- On / off switch
- Light weight and portable
- ETL & CE listed
- One year warranty

AIR COMPRESSORS



DA400R

The DA400R is a dual piston compressor and more powerful than the smaller 1/5 HP models. Great for airbrushers requiring higher air pressures.

1/4 HP

Voltage: 110V / 60hz

Operating pressure 0-50 PSI

Shipping Weight: 14 lbs (6.3kg)

Features:

- Oil-less dual piston compressor
- Regulator & moisture trap
- On / off switch
- Auto start and stop feature
- Light weight and portable
- ETL & CE listed
- One year warranty



DC600R

The DC600R is a tank mounted dual piston compressor with protective case. Great for airbrushers requiring higher air pressures and capable of running two airbrushes at once.

1/6 HP

Voltage: 110V / 60hz

Operating pressure 0-50 PSI

Shipping Weight: 24 lbs (11.8kg)

Features:

- Oil-less dual piston compressor
- 1 gallon storage tank
- Protective case with handle
- two airbrush holders
- Regulator & moisture trap
- On / off switch
- Auto stop when tank is full
- ETL & CE listed
- One year warranty



DC850R

The Paasche DC850R is a Ultra Quiet 3/4 HP compressor with a 1.6 gallon tank & regulator and moisture trap. It delivers steady air pressure at an extremely low 58 decibels. This oil free compressor has a rust free aluminum air tank with easy to use ball drain valve. This compressor is perfect for those needing power and quiet operation. Can run up to 4 airbrushes at once with (QM-4) Quick connect manifold.

Specification:

3/4 HP dual piston compressor

Regulator

1.6 Gallon rust free aluminum tank

58 decibel for quiet operation

Carry bar for easy transportation

Oil free for less maintenance

Thermal overload protection

2.4 CFM @ 40 PSI and 1.5 CFM @ 90 PSI

One tank pressure gauge and one regulator for outgoing air

(2) 1/4" NPT hose hook up - also includes quick fittings

1 year warranty

N-12 AIRBRUSH PROPELLANT CAN



Portable and disposable air source. **DOES NOT contain C.F.C.'s.** This unit provides pressure for 14-18 minutes and is recommended when a compressor or electricity is not readily available. To control the propellant volume from the unit to the airbrush an additional 3B pressure valve is required.

N-12 Airbrush propellant (Case quantity is 12)
Shipping Weight: 12 oz. (340g)/per can



R-75 FILTER REGULATOR

The R-75 is an in-line low pressure regulator with a 100 P.S.I. gauge and moisture trap. This regulator gives user control of operating pressure as well as assisting in furnishing clean, dry regulated air. Regulators must only be used as instructions and warnings specify. Five (5) micron filtration.

Includes: 1/4" M X 1/4" M coupler

AIR HOSE - FITTINGS - ADAPTERS



A-1/8 AIR HOSE

Constructed for durability this Deep red and black colored nylon braided air hose is ideal for use with all Paasche airbrushes. Available in: 4', 6', 8', 10', 15', 20', 25' and 50' lengths. Maximum working pressure is 100 P.S.I.

Catalog Number: **A-1/8-** (select length)



CH-10 COIL AIR HOSE

Sturdy and lightweight, this hose has a retractable action which keeps it from getting under foot. Available in 10' lengths ONLY. Maximum working pressure is 80 P.S.I. Catalog Number: **CH-10**



HPB-1/8-10' PLASTIC AIR HOSE

This PVC air hose is lightweight and flexible. Available in 10' length only. Maximum working pressure is 80 P.S.I.

Catalog Number: **HPB-1/8-10**



HL-3/16 AIR HOSE

3/16" diameter braided air hose. Available in: 6', 8', 10', 15' and 20' lengths. Use this air hose with Tools having 1/4"NPT threads. Maximum working pressure is 100 P.S.I.

Part #: **HL-3/16-**(select length)

The A-1/8, CH-10 & HP-1/8 hoses work with:
AEC, AECR, F, H, MIL, SI, TG, TS, V, VJR & VL

HL-3/16 hose works with:
62, AU, AUT, L, LAC, 400T, 500T, 300T



MT MOISTURE TRAP

Shown attached to an A-1/8 air hose, is our MT Moisture Trap that removes water from the airline before it reaches the airbrush. Can be ordered installed on A-1/8 hose by adding MT to the part number or ordered as just the moisture trap which can be manually installed on your existing A-1/8 hose.

Catalog Number: **MT**

A-1/8-6MT (Installed on 6' hose)

Air valve controls:



3A Needle Valve

Can be used for controlling air volume to airbrush. It is connected to the valve casing of the airbrush before the air hose.



HF-1/4 VALVE

1/4" Male - Male with open close valve.

Airbrush Adapters:



A-151 Adapter

Converts T & C and Badger brushes to use Paasche air hose.



M-66 Adapter

Converts Paasche airbrushes to use T & C and Badger air hoses.



A-202 Adapter

Converts Paasche airbrushes to use Iwata air hoses.



A-188 Adapter

Converts Iwata airbrushes to use Paasche air hoses.



DB-40 Adapter

Converts A-1/8" air hose for use with 62 sprayer.

Fittings & Adapters

Quick Disconnects:



HF-185 DETACHABLE COUPLING

Quick hose connections. A slight turn locks coupling and opens air valve, when detached, valve closes automatically.



A-204 Quick Connect Adapter 1/4" thread



A-191 Quick Disconnect

Fast release of connection of Paasche airbrush to air hose.



A-192 Quick Connect Adapter

Male half of A-191

Dual and Quad Quick Connect Manifold W/ A-204 Quick Connect Adapters.



QM-2

QM-4

Compressor Adapters:



HF-33 Adapter

(1/4"M x 1/4"M) adapter.



HF-116 Adapter

Converts Iwata & Badger compressors to fit Paasche hose. (1/8"F to 1/4"M)



HF-592 Adapter

Converts Iwata, Master, & Badger hose to fit Paasche compressor. Adapts: 1/4" NPT female to 1/8" BSP male

Pressure Tank valve:



3B Pressure Tank Valve

Used on Paasche N-12 pressure can as well as any competitors cans. Has a 1/4"NPT fitting for hose attachment

ACCESSORIES - HARDWARE



A-194 DELUXE AIRBRUSH HANGER

Clamps to any table and holds up to 4 airbrushes



AC-7 AIRBRUSH CLEANING KIT

Seven (7) piece airbrush cleaning outfit.



VL-127 STRAINER

Helps prevent large paint particles from entering the airbrush. It can be used with all Paasche bottle assemblies plastic tubes



AL-2 AIRBRUSH LUBE

2 ounce bottle of airbrush lube. used on the trigger and needle for a smoother stroke.



METAL HANDLES

Change the standard red Nylon handle by simply screwing on these Anodized Metal handles.

AFV-143 - AB,F,V,TG & TS

HVL-202 - AEC, H & VL

HVL-200 - AEC, H & VL

AIRBRUSH - TEMPORARY TATTOO PAINT

Basic Airbrush Colors

With an airbrush you can apply a large complex tattoo or large tribal armband in seconds! Paasche Tattoo Paints use only the finest ingredients and combined with our high quality airbrushes, the results cannot be beat. Our tattoo paints are made with only F.D.A. approved ingredients and are produced under lab conditions. Paasche Temporary Tattoo Paints last 3-7 days. The tattoo usually starts to fade by the 4th day. This depends on the skin type and how well you take care of the tattoo.

BASIC BODY COLORS

1 oz. and 2 oz. bottles indicated by first of three numbers.

TI-101
BLACK
TI-201



TI-104
BLUE
TI-204



TI-109
GREEN
TI-209



TI-102
RED
TI-202



TI-105
WHITE
TI-205



TI-110
PURPLE
TI-210



TI-103
YELLOW
TI-203



TI-106
HOT PINK
TI-206



TI-113
ORANGE
TI-213



SB-1 (100 Designs)



SB-5 (30 Large Designs)



SB-9 (100 Designs)



SB-10 (100 Designs)



Extreme Air

Multi-Surface Airbrush Paint



CUP – BOTTLE ASSEMBLIES
 (Cover Assembly includes everything but the container)

Glass Assemblies:



<u>Airbrush Model</u>	<u>1oz</u>	<u>3oz</u>
H & EZ	H-1-OZ	H-3-OZ
HS	HS-1-OZ	HS-3-OZ
MIL, SI, TS & VL	VL-1-OZ	VL-3-OZ
VLS	VLS-1-OZ	VLS-3-OZ

Wide Mouth Plastic Assemblies:



<u>Airbrush</u>	<u>1oz</u>	<u>3oz</u>	<u>8oz</u>
H & EZ	BA-30-1P	BA-30-3P	BA-30-8P
H & EZ		HP-3-OZ	HP-8-OZ
HS		HPS-3-OZ	HPS-8-OZ
MIL,SI,TS & VL	BA-60-1P	BA-60-3P	BA-60-8P
VLS		VLPS-3-OZ	VLPS-8-OZ

Narrow Mouth Plastic Assemblies:

(Work on Airbrush Paint Bottles)



<u>Airbrush</u>	<u>2oz</u>	<u>4oz</u>
H & EZ	BA-30-2P	BA-30-4P
MIL,SI,TS & VL	BA-60-2P	BA-60-4P

Metal Bottle Assemblies:



<u>Airbrush</u>	<u>1/4oz</u>	<u>2oz</u>
H & EZ	H-1/4-OZ	H-2-OZ
HS	H-1/4-OZ	HS-2-OZ
MIL, SI, TS 7 VL	VL-1/4-OZ	VL-2-OZ
VLS	VL-1/4-OZ	VLS-2-OZ

Storage Bottles, Bottles or Covers:

<u>Storage Bottles</u>	<u>Bottle Only</u>	<u>Solid Cover Only</u>
H-194 (Glass)	H-99 (1oz Glass)	H-191 (Metal)
H-193 (Glass)	H-108 (3oz Glass)	H-190 (Metal)
	H-106 (1oz Plastic)	BPC-1 (Plastic)
	PB-2 (2oz Plastic)	PC (Plastic)
	62-17P (3oz Plastic)	BPC-3 (Plastic)
	PB-4 (4oz Plastic)	PC (Plastic)
	H-209 (8oz Plastic)	BPC-3 (Plastic)

RESPIRATORS



99 OV/N95 RESPIRATOR-PAINT & VAPOR

This respirator is NIOSH approved to protect against most organic vapors and a minimum 95% efficient filtering of non-oil particulates. This typically includes inks, solvents, lacquer and enamel paints (including oil based paints) welding fumes, dusts and mists. **Read WARNING AND INSTRUCTIONS IN PACKAGE.**

99-8 N95 replacement filter pads (4 per bag)

99-9 Organic vapor cartridges (2 per bag)



2DS SOFTSEAL DISPOSABLE RESPIRATOR -DUSTS

This single use respirator should only be used with AEX, AE and SSO powders. **Do not** use with Paints. It is NIOSH approved to be a minimum 95% efficient in filtering out non-oil particulates. This typically includes dusts, welding fumes and non-oil mists. **Not for use against paint spray, gases, vapors or asbestos.** **Read All WARNINGS AND INSTRUCTIONS IN PACKAGE.**

2DS Softseal respirator. Sold in package of 4

AIRBRUSH STORAGE CASE



P-178 Deluxe Wood Case

All Airbrushes



TTALB TWENTY TWO AIRBRUSH LESSONS FOR BEGINNERS

New edition with translations in French, German and Spanish. This instructional booklet teaches the basics of airbrush control with easy to follow illustrated lessons using masks, stencils and frisket paper.




TSA T-SHIRT AIRBRUSHING

Dale Boyd

Learn basic airbrush care, cleaning and beginning to advanced painting techniques with a Paasche model VL airbrush. Application on T-Shirts, hats, and other soft goods.

LXG & LXS HVLP SPRAY GUNS

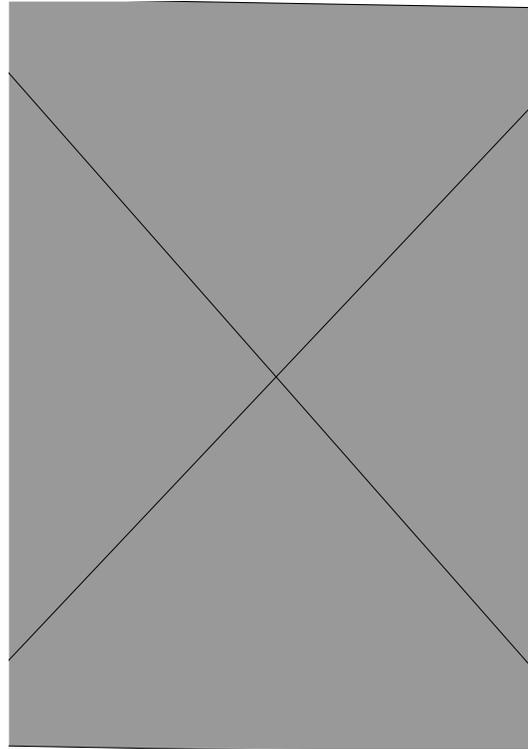

LXG Gravity Feed HVLP Spray Gun

Light weight, easy to control, perfect for large and small jobs. Adjustable to achieve round and flat spray patterns. Get a superior finish while saving paint. The LX spray guns apply paint with less force which reduces both overspray and paint bounce from the surface. Installes with a PTFE packing and both the fluid tip and needle are stainless steel allowing spraying of water and solvent based.

We also have head sizes 1.7mm & 2.0mm, switching sizes just requires changing the tip, needle and aircap.

SPECS:

Part Number: LXG-14, 17 or 20
 Type: HVLP Gravity Feed
 Head Size: 1.4mm, 1.7mm or 2.0mm
 Air Volume: 6-10 CFM
 Air Pressure: 30-45 PSI
 Air Inlet: ¼" NPT
 Bottle size: 20 Ounce
 Spray Pattern: 1" to 12"
 Weight: 1.56 Lbs
 Finish: Bright Chrome / Gold Anodized trim

SPECS:

Part Number: LXS-14, 17 or 20
 Type: HVLP Siphon Feed
 Head Size: 1.4mm, 1.7mm or 2.0mm
 Air Volume: 6-10 CFM
 Air Pressure: 30-45 PSI
 Air Inlet: ¼" NPT
 Bottle size: 32 Ounce
 Spray Pattern: 1" to 12"
 Weight: 1.94 Lbs
 Finish: Bright Chrome / Gold Anodized trim

Catalog Number	Description
LXG-14	Simply dummy text of the printing
LXG-17	It is a long established fact that a
LXG-20	There are many variations of pas

Catalog Number	Description
LXS-14	Simply dummy text of the printing
LXS-17	It is a long established fact that a
LXS-20	There are many variations of pas

LMG & HG HVLP TOUCHUP GUNS

LMG-10 HVLP Touchup Spray Gun

Great for jobs needing a smaller pattern or less material than supplied by the LX series. Includes PTFE packings and stainless steel tip and needle for spraying both Water based and solvent based materials.

SPECS:

Part Number: LMG-10
Type: HVLP Gravity Feed
Head Size: 1.0 mm
Air Volume: 2-5 CFM
Air Pressure: 30-45 PSI
Air Inlet: ¼" NPT
Bottle size: 4 Ounce
Spray Pattern: 1/2" to 7"
Weight: .7 Lbs
Finish: Bright Chrome / Gold Anodized trim



Catalog Number	Description
LMG-10	HVLP touchup spray gun
HL-3/16-10	10 Braided air hoses of Ipsum.
RG-160	Air regulator

HG-08 HVLP Touchup Gun


The HG touchup gun will come with our smallest spray heads. It is installed with .8mm and has heads .5 & 1.0mm

In addition the HG has a special detail/stipling aircap for fine line or a splatter effect.

SPECS:

Part Number: HG-08
Type: HVLP Gravity Feed
Head Size: .8 mm (.5mm & 1mm)
Air Volume: 2-5 CFM
Air Pressure: 30-45 PSI
Air Inlet: ¼" NPT
Bottle size: 3oz Metal Cup & Cover
Spray Pattern: 1/8" to 7"
Weight: .7 Lbs

Catalog Number	Description
HG-08	.8mm HVLP touchup spray gun
HG-15-08	Detail or stipling aircap
RG-160	Air regulator

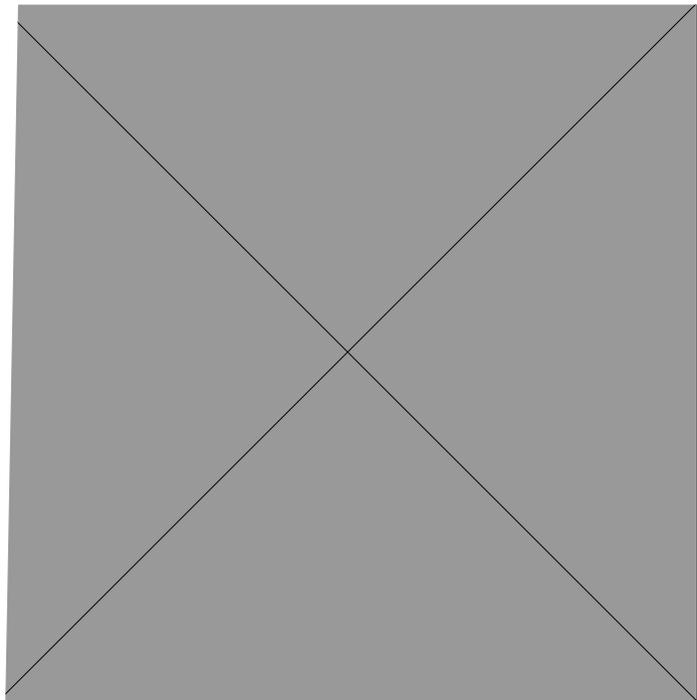

HOBBY TABLE TOP SPRAY BOOTHS



HSSB-22-16 HOBBY SHOP SPRAY BOOTH

Rugged, compact in size and easy to assemble. This portable booth features galvanized metal for easy cleaning and durability. Working dimensions are 22" wide x 18-1/2" high. Includes a 235 CFM fan with standard ground house outlet plug. Uses a carbon and fiberglass filter system. It is intended to remove larger particles from the air BUT WILL NOT REMOVE ALL HAZARDOUS MATERIALS FROM THE AIR. When spraying materials that have strong vapors or harmful chemicals, exhaust MUST be vented to the outside. If necessary, wear goggles and/or protective paint and vapor mask. See pg. 17 for Paint & Vapor Respirator. **SM-1390 Duct Adapter included.**


Shipping Weight: 30 lbs. (13.6kg)



HSSB-30-16 HOBBY SHOP SPRAY BOOTH - DOUBLE EXHAUST

Working dimensions are 30" wide x 18-1/2" high, with two exhaust chambers and fans for double the air flow. Other features are the same as above.


Shipping Weight: 44 lbs. (20kg)



HB-16-13 HOBBY SPRAY BOOTH - If you purchase two booths, they can be combined into one larger booth.

Rugged, compact in size and easy to assemble. Working dimensions are 16.5"W x 13.5"H x 19"D, perfect for small ceramics to radio control Models. Equipped with standard grounded cord and 115 Volt fan. Uses a double fiberglass filter system. It is intended to remove larger particles from the air. BUT WILL NOT REMOVE ALL HAZARDOUS MATERIALS FROM THE AIR. If necessary, wear goggles and/or protective paint and vapor mask. See pg. 24 for paint & vapor respirator. Comes with HB4X5 Reducer for exhausting to the outside.

Shipping Weight: 8.4 lbs. (3.8kg)



BBF ECONOMY FILTER TYPE BENCH BOOTH


Constructed of 20 gauge galvanized sheet steel in single or multiple sections. Ideal where space is a premium and allows operator to sit while working. Offers the convenience of AG- fiber glass filters. This booth can accommodate optional top or back exhaust and/or optional BBL Legs which convert booth from bench to freestanding booth. Extra set of AG- filters provided.

BBF-2 — 2'(W) x 2'6"(D) x 2'(H) **BBF-3** — 3'(W) x 2'6"(D) x 2'(H) **BBF-4** — 4'(W) x 2'6"(D) x 2'(H)

ACCESSORIES FOR PAASCHE SPRAY BOOTHS:

- AG-12** Glass Filters (50/ctn.) for Models EBF, BBF & TEBF
- AG-20** Glass Filters (50/ctn.) for Models FABSF and FABF
- NO.25** Draft Gauge
- BBL-1** Set of four(4) Legs for Model BBF Only

SPRAY BOOTHS

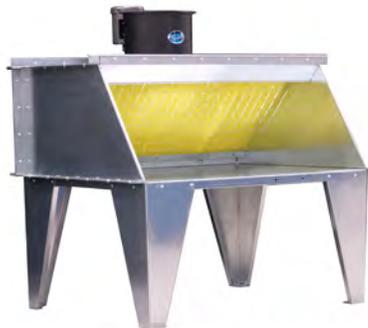

EBF SINGLE EXHAUST FILTER TYPE BENCH BOOTH

AG- fiber glass filters, efficiently trap coating solids as they are drawn through the working area of the spray booth; resulting in cleaner operation and minimal accumulation of overspray on the fan blades, duct interior or exhaust stack. Supplied with extra set of AG-filters. Please specify top or back exhaust. NOTE: Dimensions shown are for inside working area.

EBF-3 — 3'(W) x 2'6"(D) x 2'(H) **EBF-4** — 4'(W) x 2'6"(D) x 2'(H) **EBF-5** — 5'(W) x 2'6"(D) x 2'(H)
EBF-6 — 6'(W) x 2'6"(D) x 2'(H) **EBF-8** — 8'(W) x 2'6"(D) x 2'(H)



FABSF FILTER SHELF BOOTH

Features 18 gauge galvanized steel panels with flanged edges. Filter sections include AG fiber glass filters which can be quickly and inexpensively replaced when necessary. These filter cells prevent overspray from being exhausted to the outside atmosphere and accumulating on the fan and exhaust piping. An extra set of AG filters and draft gauge are supplied with each booth. Will accommodate top or back exhaust, and is available in many standard sizes or can be designed to meet your requirements. Openings are available, in roof or side panels, to accommodate lighting fixtures.

FABSF-3 — 3'(W) x 2'(D) x 4'6"(H) **FABSF-6** — 6'(W) x 3'(D) x 4'6"(H)
FABSF-4 — 4'(W) x 3'(D) x 4'6"(H) **FABSF-8** — 8'(W) x 3'(D) x 4'6"(H)
FABSF-5 — 5'(W) x 3'(D) x 4'6"(H)



FABF FILTER FLOOR BOOTH

Filter Floor Booth features 18 gauge galvanized steel panels with flanged edges. Filter cell sections include AG fiber glass filters which can be quickly replaced when necessary. These filter cells provide maximum air flow with minimal face loading and pass-through of overspray. An extra set of filters and draft gauge are supplied with each booth. FABF booths will accommodate top or back exhaust. They are available in many standard sizes or can be designed to meet your requirements. Openings are available, in roof or side panels, to accommodate lighting fixtures.

FABF-3 — 3'(W) x 3'(D) x 7'(H) **FABF-6** — 6'(W) x 5'(D) x 7'(H)
FABF-4 — 4'(W) x 3'(D) x 7'(H) **FABF-8** — 8'(W) x 6'(D) x 7'(H)
FABF-5 — 5'(W) x 3'(D) x 7'(H)



FBSL-3-6 FILTER SHELF BOOTH

Filter Bench Booth features 18 gauge galvanized steel panels with flanged edges. Filter cell section includes AG fiber glass filters which can be quickly replaced when necessary. The filter cell provides maximum air flow with minimal face loading and pass-through of overspray. An extra set of filters and draft gauge are supplied with each booth. This Bench Booth is designed to meet your businesses needs and to comply with spray booth regulations. The Booth is shipped knocked- down flat and crated so assembly is required. The motor and optional light will need to be hard wired to a switch which your local electrician should supply.

Working Dimensions: 3'6" Wide x 3' Deep x 3'6" High
Overall Dimensions: 3'10" Wide x 3'2" Deep x 6' High
Features: 18 Gauge Galvanized Steel Panel construction • Belt Guard • Draft Gauge • Vent Ring • Two sets of Paint Filters • 12" Exhaust Vent with sparkless aluminum fan blade (uses 12" round duct) • 1/4 H.P., 1 Phase, Totally Enclosed Motor • Full assembly instructions and drawings.

LIMITED WARRANTY

Paasche Airbrush Company ("Paasche") warrants the product manufactured by it to be commercially free from any defects in material and workmanship for a one year period after the original date of consumer purchase. This warranty does not extend to any product that has been affected by wear or damage resulting from misuse, abrasion, corrosion, negligence, accident, tampering, faulty installation, inadequate maintenance, damage or casualty, or to any product that has been improperly repaired or altered in any way that affects the condition of operation of the equipment. In the case of accessories or components furnished, but not manufactured by Paasche, Paasche assigns to the buyer, to the extent permitted, the warranty of the manufacturer.

If the product should become defective within the warranty period, we will elect to repair or replace it free of charge, including return transportation provided it is delivered prepaid with proof of purchase (such as cancelled check or register receipt from place of purchase) to

PAASCHE AIRBRUSH COMPANY
9511 58th Place

Kenosha, WI 53144

Any questions regarding warranty service can be directed to Paasche at the address listed above.

Paasche shall not be liable for any damage, or loss, including, but not limited to, incidental or consequential damage for injury to persons, products, buildings, contents of buildings or other property, or for any other direct, incidental or consequential loss. The Buyer's exclusive remedy against Paasche for the breach of any obligation under this sales contract, whether derived from warranty or otherwise, shall be limited, as specified herein, to repair or replacement. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations may not apply to you. This warranty gives you specific rights, you may also have other rights which vary from state to state.

Paasche

9511 58th Place

Kenosha, WI 53144

PHONE: 773-867-9191

Website: www.paascheairbrush.com

E-Mail: info@paascheairbrush.com

COMPRESSORS	PAASCHE®											
D220R	E	E	E	E	E	E	E	E	E	G	E	G
D500, D500SR	G	G	G	E	E	E	E	G	E	NR	NR	NR
D3000R	G	G	G	E	E	E	E	G	G	NR	NR	NR
DA300R	G	G	G	E	E	E	E	G	E	NR	NR	NR
DA400R	E	E	E	E	E	E	E	E	E	E	E	E
DC600R	E	E	E	E	E	E	E	E	E	E	E	E
AIRBRUSHES	VL - SERIES SIPHON DOUBLE ACTION	VLSTPRO SIPHON DOUBLE ACTION	MILLENNIUM SIPHON DOUBLE ACTION	TS - TALON SIPHON DOUBLE ACTION	V - SERIES SIPHON DOUBLE ACTION	TG - TALON GRAVITY DOUBLE ACTION	TGX - Vision GRAVITY DOUBLE ACTION	SI SIPHON SINGLE ACTION	H - SERIES SIPHON SINGLE ACTION	62 - SPRAYER SIPHON SINGLE ACTION	500T SPRAY GUN	AEC, AECR ABRASIVE
APPLICATIONS												
Body Art Tattoo	E	E	E	E	NR	G	G	E	G	NR	NR	NR
Custom Auto & Motorcycle Graphics	G	E	E	E	NR	E	E	NR	NR	NR	NR	NR
T-Shirt Airbrushing	E	E	E	E	NR	NR	NR	NR	G	NR	NR	NR
Finger Nail / Makeup	NR	NR	NR	G	NR	E	E	G	NR	NR	NR	NR
Taxidermy	E	E	E	E	NR	E	E	E	E	G	NR	NR
Graphic Arts	G	E	G	E	E	E	E	NR	NR	NR	NR	NR
Illustrators	NR	NR	NR	E	G	E	E	NR	NR	NR	NR	NR
Leather Airbrushing	E	NR	E	E	NR	E	E	E	E	NR	NR	NR
Model / Trains / RC Cars	E	NR	E	E	NR	E	E	E	E	NR	NR	NR
Chip or Ding Repair	E	G	E	E	NR	G	G	E	E	NR	NR	NR
Ceramics	E	NR	E	E	NR	G	G	E	E	E	NR	NR
Cake Decorating	E	NR	E	E	NR	E	E	G	E	NR	NR	NR
Home - Airbrush Tanning	E	NR	NR	E	NR	NR	NR	G	E	NR	E	NR
Salon - Airbrush Tanning	E	NR	NR	E	NR	NR	NR	G	G	NR	E	NR
Glass Etching	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	NR	E
E - EXCELLENT G - GOOD NR - NOT RECOMMENDED												

Paasche Airbrush Company reserves the right to make alterations, without prior notice, to the specifications and range of its equipment (including withdrawal of products) referred to in this catalog. All shipping weights, and fluid capacities listed in this catalog are approximate.